

*World Leader in  
High Flow Technology*



**PIONEER PUMP, INC.**

## **Standard Centrifugal Vertical Pumps**

- Available Configurations
  - Vertical Coupled
  - Vertical Frame
  - Vertical Close Coupled (Some Models)
- 1½"-18" Sizes Available
- Flow Rates From 50 to 18,000 GPM
- Solids Handling and Clear Liquids Models Available
- Solids Handling to 4.5"
- Heads to 600+ Feet
- Vertical P-Base Electric Motors Available with a Variety of Enclosure Options
- Reliance Immersible Motors Available
- Base Elbow With Clean Out
- Various Sealing Configurations Available
- Premium Hydraulic Efficiency For Reduced Operating Costs
- Two Year Warranty
- Low Maintenance
- Special Alloys Available



# The Most Complete Line Available



## The Pioneer Family of Pumps



### PRIME SERIES

Vacuum Assisted Run Dry, Prime From Dry, Re-Prime Pumps - Available for Solids Handling or Clear Liquid Service

**Sizes:** 3-18 Inch

**Flows:** 50-18,000 GPM

**Heads:** to 500+ Feet



### STANDARD CENTRIFUGAL SERIES

Standard End Suction Centrifugal Available for Solids Handling or Clear Liquid Service

**Sizes:** 1½-18 Inch

**Flows:** 50-18,000 GPM

**Heads:** to 500+ Feet



### SELF-PRIMING SERIES

Standard Self-Priming Pumps Available for Solids Handling or Clear Liquid Service

**Sizes:** 1½-10 Inch

**Flows:** 20-3500 GPM

**Heads:** to 200 Feet




### HYDRAULIC SUBMERSIBLE & POWER UNIT SERIES

Pumps and Power units Available for Solids Handling or Clear Liquid Service

**Sizes:** 4-12 Inch

**Flows:** 200-7000 GPM

**Heads:** to 160 Feet

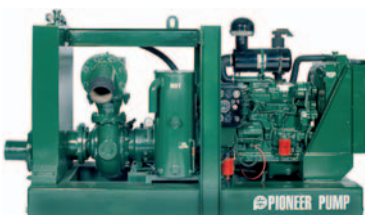

### WELLPOINT SERIES

Bare Pumps or Packages Available

**Sizes:** 3-18 Inch

**Flows:** 200-18,000 GPM

**Heads:** to 500+ Feet

